



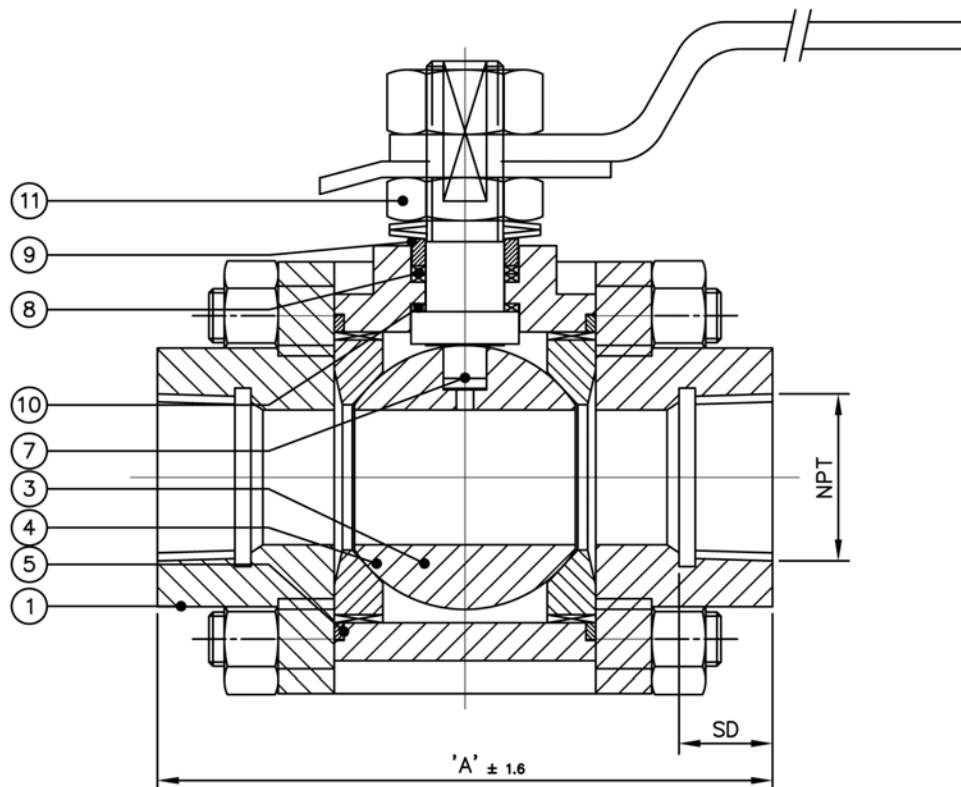

S.No.	DESCRIPTION	QTY.	MATERIAL
1	BODY	1	ASTM A 216 Gr. WCB/WCC/ASTM A 351 Gr. CF8/CF8M/ASTM A 352 Gr. LCB/LCC/ASTM A 105
2	SIDE COVER	1	ASTM A 216 Gr. WCB/WCC/ASTM A 351 Gr. CF8/CF8M/ASTM A 352 Gr. LCB/LCC/ASTM A 105
3	BALL	1	AISI-410/S.S.-304/S.S.-316
4	SEAT RING	2	GRAFOIL/PTFE/VITON
5	BODY SEAL	1	GRAFOIL/PTFE/VITON/SPIRAL WOUND SS316/316L WITH GRAPHITE FILLER
6	BODY STUD	AS	ASTM A 193 Gr.B7/B7M/A 320 Gr. L7
	BODY STUD NUT	REQD.	ASTM A 194 Gr.2H /2HM/Gr. 4
7	STEM	1	AISI-410/S.S.-304/S.S.-316
8	GLAND PACKING	—	GRAFOIL/PTFE/VITON
9	GLAND	1	AISI-410/S.S.-304/S.S.-316
10	STEM SEAL	1	PTFE/VITON/CFT
11	GLAND NUT	1	AISI-410/S.S.-304/S.S.-316



DETAILS-'A'
ANTISTATIC DEVICE

TEST PRESSURE PSIG			
CLASS	HYDROSTATIC	AIR	
150	BODY	SEAT	SEAT
	425	300	80

DESIGN FEATURES	
DESIGN AND DIMENSIONS	API-6D
ENDS FLANGE DIMENSIONS	ASME B1.20.1
TESTING	API-6D
FIRE SAFE	API-6FA

ALL BELOW SPECIFICATIONS ARE FOR INFORMATORY PURPOSE ONLY,
AND ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

2"	125	19.5	2"
1½"	114	18.4	1½"
1"	96	17.3	1"
¾"	74	14.5	¾"
½"	68	13.5	½"
SIZE NB	'A'	'SD'	'NPT'

DESCRIPTION

CARBON STEEL 3 PIECE (R.B.) BALL VALVE FLOATING
HANDLE OPERATED CLASS:-150 SIZE:- ½" TO 2"

DRN:
DATE:

CHKD:
DATE:

APPD:
DATE:

DRAWING NO.:

FORWARD ALLOYS AND CASTINGS
L.B.S. MARG, BHANDUP BOMBAY